




尺寸 Size:390mmx112mm
 风量 Airflow:2100~3120m³/hr
 1235~1836CFM

重量 Weight:5900g
 噪音 Noise:56~65dBA
 风叶 Impeller:Iron Leaf
 外框 Frame:All Metal
 引线 Lead Wire:The Mostable Wire
 马达 Motor:Capacitor-Run External Rotor
 Induction Motor

安规认证 Safety:TUV>CE>CCC
 温度范围 Operation Temperature:-10°C ~ +105°C



Model (型号)	Bearing System (轴承型式)	voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	Air Flow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
350FZY2-D	Ball	200~240	50/60	0.7	150	1360/1500	62/65	2880/3120	1695/1836	1	4.0uf/500v
350FZY3-D	Ball	380~420	50/60	0.35	150	1360/1500	62/65	2880/3120	1695/1836	3	—
350FZY4-D	Ball	380~420	50/60	0.4	150	1360/1500	62/65	2880/3120	1695/1836	1	2.2uf/630v
350FZY10-D	Ball	200~240	50/60	0.42	91	950/1050	56/60	2100/2300	1235/1353	1	3.0uf/500v
350FZY11-D	Ball	380~420	50/60	0.3	91	950/1050	56/60	2100/2300	1235/1353	3	—
350FZY12-D	Ball	380~420	50/60	0.35	91	950/1050	56/60	2100/2300	1235/1353	1	2.0uf/630v

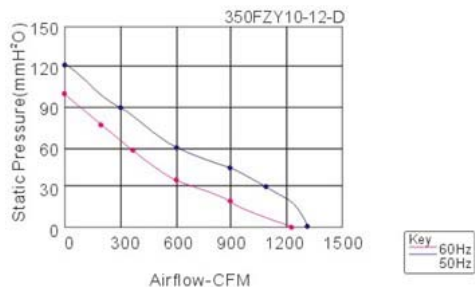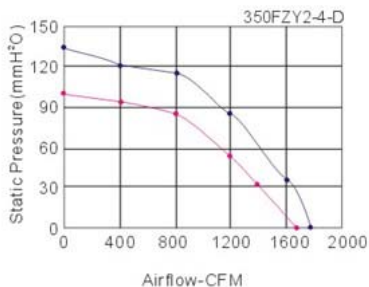

Key
 — 60Hz
 — 50Hz