




尺寸 Size:440mmx125mm  
 风量 Airflow:3360~4400m<sup>3</sup>/hr  
 1977~2589CFM

重量 Weight:6800g  
 噪音 Noise:58~70dBA  
 风叶 Impeller:Iron Leaf  
 外框 Frame:All Metal  
 引线 Lead Wire:The Mostable Wire  
 马达 Motor:Capacitor-Run External Rotor  
 Induction Motor

安规认证 Safety:CE>Ⓢ  
 温度范围 Operation Temperature:-10°C ~ +105°C



Model (型号)	Bearing System (轴承型式)	voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	Air Flow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
400FZY2-D	Ball	200~240	50/60	0.8	180	1400/1560	68/70	4080/4400	2400/2589	1	6.0uf/500v
400FZY3-D	Ball	380~420	50/60	0.4	180	1400/1560	68/70	4080/4400	2400/2589	3	—
400FZY4-D	Ball	380~420	50/60	0.45	180	1400/1560	68/70	4080/4400	2400/2589	1	3.0uf/630v
400FZY10-D	Ball	200~240	50/60	0.5	112	950/1050	58/61	3360/3620	1977/2130	1	4.0uf/500v
400FZY11-D	Ball	380~420	50/60	0.35	112	950/1050	58/61	3360/3620	1977/2130	3	—
400FZY12-D	Ball	380~420	50/60	0.40	112	950/1050	58/61	3360/3620	1977/2130	1	2.2uf/500v

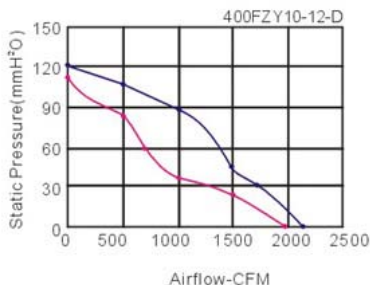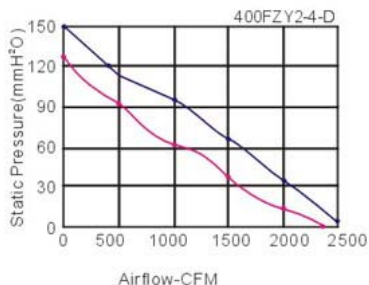

Key  
 — 60Hz  
 — 50Hz