




使用安装方法

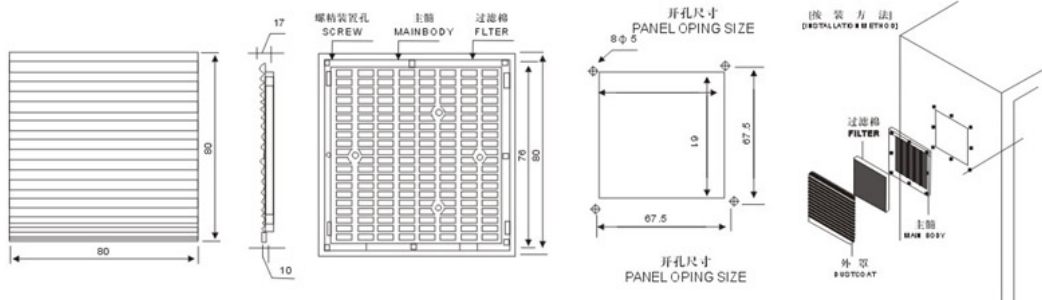

通风过滤网组 ventilation mesh and filtration system

通风网本体材料：ABS树脂（难燃，耐紫外线特性）94V-O，UL防火线
 Ventilation mesh's body material: The ABS resin (with the feature of Flame-Retardant anti ultraviolet ray) 94V-O, the UL trench

滤网材质：尼龙纤维合成树脂

Strainer material: Nylon fibre synthetic resin

滤网压损：初期6.7mmAQ 终期20mmAQ

Pressing damages of strainer: Initial period 6.7mmAQ final stage 20mmAQ

最大风速度：1.5M/SEC

Maximum wind speed: 1.5M/SEC

使用范围：50m³/MIN

Use scope: 50m³/MIN

除产率：AF186% \ (给产量：520g/m²) (JAPAN AIR FILTER INSTIUDE)

Production rate: AF186% \ (output: 520g/M²) (JAPAN AIR FIL TER INSTIUDE)

适用风扇：YMI206P-0.55m³/MIN

Applicable ventilator: YMI206P-0.55m³/MIN

附件：过滤网 X 1PC

Appendix: Strainer X 1PC

螺丝组 X8PCS

Screw set X8PCS

注意：过滤网请定期清洁，以维持通风过滤效果。过滤网之清洁请以（吸尘器）及（压缩空气）进行

Note: The strainer should be cleaned regularly in order to maintain the effects of ventilation and filtration.

Please use vacuum cleaner and compressed air for strainer cleaning.