




## 使用安装方法

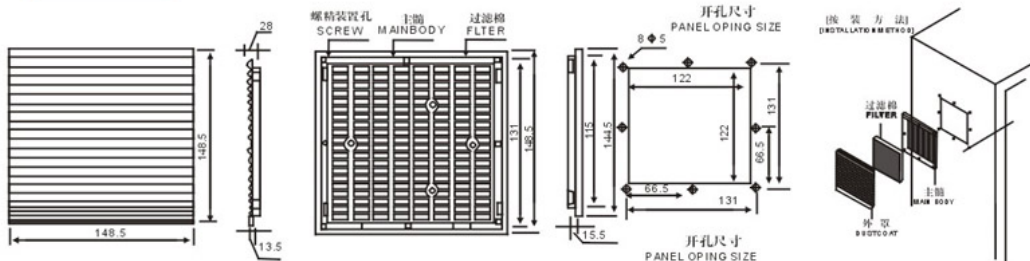

## 通风过滤网组 ventilation mesh and filtration system

通风网本体材料: ABS树脂(难燃,耐紫外线特性)94V-O, UL防火线

Ventilation mesh's body material: The ABS resin ( with the feature of Flame-Retardant anti ultraviolet ray ) 94V-O, the UL trench

滤网材质: 尼龙纤维合成树脂

Strainer material: Nylon fibre synthetic resin

滤网压损: 初期6.7mmAQ 终期20mmAQ

Pressing damages of strainer: Initial period 6.7mmAQ final stage 20mmAQ

最大风速度: 1.5M/SEC

Maximum wind speed: 1.5M/SEC

使用范围: 50m<sup>3</sup>/MIN

Use scope: 50m<sup>3</sup>/MIN

除产率: AF186% (给产量: 520g/m<sup>2</sup>) (JAPAN AIR FILTER INSTIUDE)

Production rate: AF186% (output: 520g/M<sup>2</sup>) (JAPAN AIR FIL TER INSTIUDE)

适用风扇: G1238HBL-2.4m<sup>3</sup>/MIN

Applicable ventilator: G1238HBL-2.4m<sup>3</sup>/MIN

附件: 过滤网 X 1PC

Appendix: Strainer X 1PC

螺丝组 X8PCS

Screw set X8PCS

注意: 过滤网请定期清洁, 以维持通过滤效果。过滤网之清洁请以(吸尘器)及(压缩空气)进行

Note: The strainer should be cleaned regularly in order to maintain the effects of ventilation and filtration.

Please use vacuum cleaner and compressed air for strainer cleaning.