



尺寸 Size:172mmx150mmx51mm

风量 Airflow:272-336m³/hr

160-198CFM

重量 Weight:860g

噪音 Noise:49-59dBA

风叶 Impeller:PBT Thermoplastic Black ,UL94-V0

外框 Frame:Aluminum Alloy

端子 Terminals: 0.5mm



引线 Lead Wire:AWG#22 UL 1015

(Optional)

马达 Motor:Shaded Pole Induction Motor

安规认证 Safety:UL>CUL>TUV>CE>CCC

温度范围 Operation Temperature:-10°C ~ +65°C

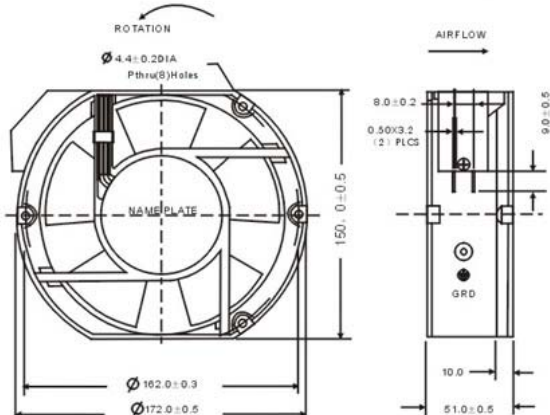

Model (型号)	Bearing System (轴承型式)	voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	AirFlow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
G1750HA,S	Sleeve	100-125	50/60	0.40	38	2600/2900	54/59	299/336	178/198	1	/
G1750HA ₂ S		200-240	50/60	0.22	38	2600/2900	54/59	299/336	178/198	1	/
G1750HA ₃ S		380-420	50/60	0.12	38	2600/2900	54/59	299/336	178/198	1	/
G1750MA,S	Sleeve	100-125	50/60	0.35	35	2200/2600	49/54	272/300	160/176	1	/
G1750MA ₂ S		200-240	50/60	0.19	35	2200/2600	49/54	272/300	160/176	1	/
G1750MA ₃ S		380-420	50/60	0.12	35	2200/2600	49/54	272/300	160/176	1	/
G1750HA,B	Ball	100-125	50/60	0.40	38	2600/2900	54/59	299/336	178/198	1	/
G1750HA ₂ B		200-240	50/60	0.22	38	2600/2900	54/59	299/336	178/198	1	/
G1750HA ₃ B		380-420	50/60	0.12	38	2600/2900	54/59	299/336	178/198	1	/
G1750MA,B	Ball	100-125	50/60	0.35	35	2200/2600	49/54	272/300	160/176	1	/
G1750MA ₂ B		200-240	50/60	0.19	35	2200/2600	49/54	272/300	160/176	1	/
G1750MA ₃ B		380-420	50/60	0.12	35	2200/2600	49/54	272/300	160/176	1	/

