



详细介绍:

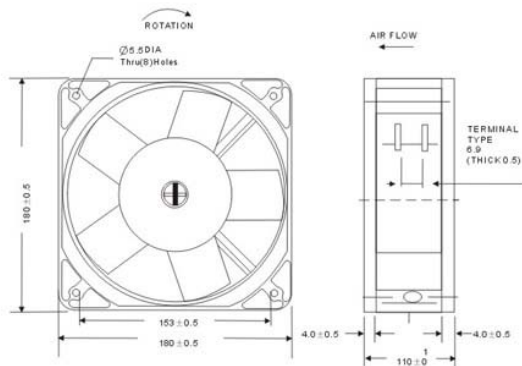

尺寸 Size:180mmx180mmx110mm
 风量 Airflow:960~1140m³/hr
 560~670CFM

重量 Weight:2400g
 噪音 Noise:69~73dBA
 风叶 Impeller:PBT Thermoplastic Black ,UL94~VO
 外框 Frame:Aluminum Alloy
 端子 Terminals: 0.5mm
 引线 Lead Wire:AWG#22 UL 1015
 (Optional)

马达 Motor:Capacitor-Run Induction Motor
 安规认证 Safety:UL>CUL>TUV>CE>CCC
 温度范围 Operation Temperature:-10℃ ~ +65℃



Model (型号)	Bearing System (轴承型式)	voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	Air Flow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
G18110HA,B	Ball	100~125	50/60	0.82	80	2600/3000	69/73	960/1140	565/670	1	4uf/250v
G18110HA,B	Ball	200~240	50/60	0.4	80	2600/3000	69/73	960/1140	565/670	1	2uf/500v

