

尺寸 Size:225mmx225mmx80mm
 风量 Airflow:1050~1290m³/hr
 618~760CFM

重量 Weight:2150g

噪音 Noise:63~66dBA

风叶 Impeller:Iron Leaf

外框 Frame:Aluminum Alloy


引线 Lead Wire:The Mostable Wire

马达 Motor:Capacitor-Run External Rotor
 Induction Motor

安规认证 Safety:UL>CUL>TUV>CE>CCC

温度范围 Operation Temperature:-10℃ ~ +105℃

Model (型号)	Bearing System (轴承型式)	voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	AirFlow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
G22580HA,BL-7P	Ball	100~125	50/60	0.74	80	2500/2850	63/66	1050/1290	618/760	1	4.0uf/250v
G22580HA,BL-7P		200~240	50/60	0.4	80	2500/2850	63/66	1050/1290	618/760	1	2.2uf/500v
G22580HA,BL-7P	Ball	380~420	50/60	0.28	80	2500/2850	63/66	1050/1290	618/760	3	—
G22580HA,BL-7P		380~420	50/60	0.32	80	2500/2850	63/66	1050/1290	618/760	1	2.2uf/630v

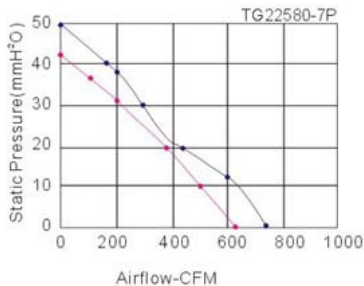

Key
 — 60Hz
 — 50Hz