

尺寸 Size:170mmx150mmx55mm

风量 Airflow:289~408m<sup>3</sup>/hr

170~240CFM

重量 Weight:1200g

噪音 Noise:47~54dBA

风叶 Impeller:Iron Leaf

外框 Frame:Aluminum Alloy

端子 Terminals: 0.5mm

引线 Lead Wire:The Mostable Wire


(Optional)

马达 Motor:Shaded Pole External Rotor



Induction Motor

安规认证 Safety:UL>CUL>TUV>CE>Ⓢ

温度范围 Operation Temperature:-10℃ ~ +105℃



Model (型号)	Bearing System (轴承型式)	voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	AirFlow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
TG17055HA,B	Ball	100~125	50/60	0.6	46	2700/3100	50/54	340/408	200/240	1	/
TG17055HA,B		200~240	50/60	0.3	46	2700/3100	50/54	340/408	200/240	1	/
TG17055MA,B	Ball	100~125	50/60	0.5	42	2400/2800	47/50	289/355	170/210	1	/
TG17055MA,B		200~240	50/60	0.26	42	2400/2800	47/50	289/355	170/210	1	/

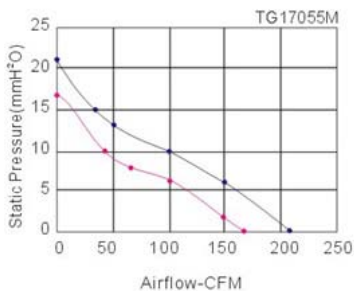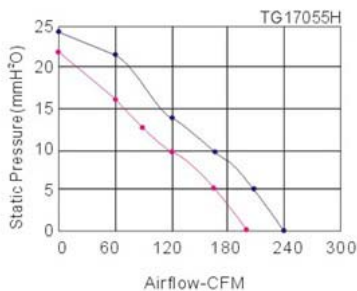

Key  
— 60Hz  
— 50Hz