

马达 Motor:Brushless DC,auto restart  
Impedance & polarity protected

风叶外壳 Impeller & Frame:Glassfiber reinforced thermoplastic  
PBT,UL94V-0

绝缘 Insulation Resistance:Min.10M at DC 500V

耐压 Dielectric Stength:500VAC/1 sec. Max.leakage  
500 micro amp.



温度范围 Permissible Temp Range:Ball bearing -20 °C ~ +75 °C  
Sleevel bearing -10 °C ~ +50 °C

安规认证 Safety:UL>CUL>CE

寿命 Life Expectancy at 40 :Ball bearing 50000 hours  
Sleeve bearing 30000 hours



BRUSHLESS FAN  
40 × 40 × 10mm

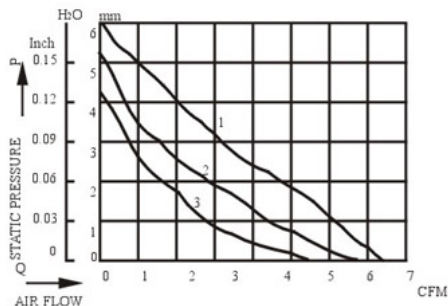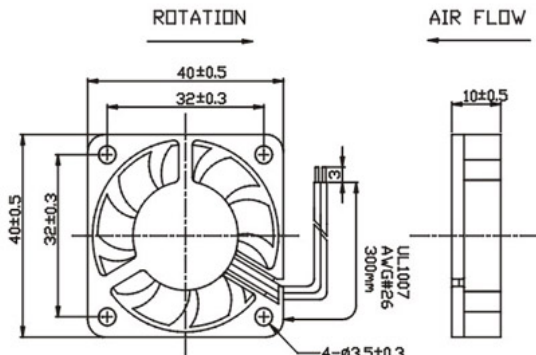

Model (型号)	Rated Voltage (VDC) (额定电压)	Startup Voltage (VDC) (启动电压)	Current Amp (A) (电流)	Speed (rpm) (转速)	Air Flow (CFM) (风量)	Static Pressure (mm-H <sub>2</sub> O) (风压)	Noise Level (dB-A) (噪音)	Weight (g) (重量)
YM0504PFS1	5.0	3.0	0.17	7000	6.08	4.01	28.0	16.0
YM0504PFB1								
YM0504PFS2								
YM0504PFB2								
YM0504PFS3	5.0	3.0	0.15	6000	5.21	3.44	24.0	16.0
YM0504PFB3								
YM0504PFS1								
YM0504PFB1								
YM1204PFS2	12.0	5.0	0.09	7000	6.08	4.01	28.0	16.0
YM1204PFB2								
YM1204PFS3								
YM1204PFB3								
YM2404PFS1	24.0	10.0	0.07	8000	6.95	4.58	30.0	16.0
YM2404PFB1								
YM2404PFS2								
YM2404PFB2								
YM2404PFS3	24.0	10.0	0.05	7000	6.08	4.01	28.0	16.0
YM2404PFB3								
YM2404PFS1								
YM2404PFB1								
YM2404PFS2	24.0	10.0	0.04	6000	5.21	3.44	24.0	16.0
YM2404PFB2								
YM2404PFS3								
YM2404PFB3								