

马达 Motor: Brushless DC, auto restart  
Impedance & polarity protected

风叶外壳 Impeller & Frame: Glassfiber reinforced thermoplastic  
PBT, UL94V-0

绝缘 Insulation Resistance: Min. 10M at DC 500V

耐压 Dielectric Strength: 500VAC/1 sec. Max. leakage  
500 micro amp.



温度范围 Permissible Temp. Range: Ball bearing -20 °C ~ +75 °C  
Sleeve bearing -10 °C ~ +50 °C

安规认证 Safety: UL > CUL > CE

寿命 Life Expectancy at 40 : Ball bearing 50000 hours  
Sleeve bearing 30000 hours



BRUSHLESS FAN  
50 × 50 × 10mm

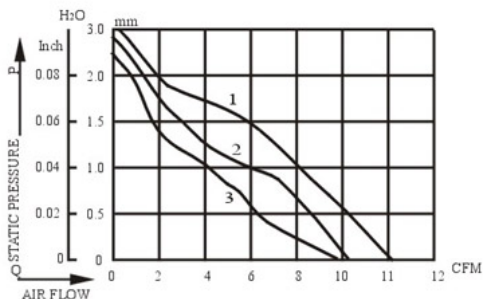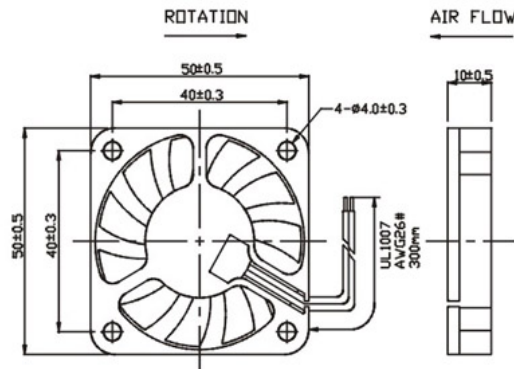

Model (型号)	Rated Voltage (VDC) (额定电压)	Startup Voltage (VDC) (启动电压)	Current Amp (A) (电流)	Speed (rpm) (转速)	Air Flow (CFM) (风量)	Static Pressure (mm-H <sub>2</sub> O) (风压)	Noise Level (dB-A) (噪音)	Weight (g) (重量)
YM0505PFS1	5.0	3.5	0.20	5000	11.20	3.30	26.0	20.0
YM0505PFB1								
YM0505PFS2								
YM0505PFB2	5.0	3.5	0.17	4500	10.08	2.97	23.4	20.0
YM0505PFS3								
YM0505PFB3								
YM1205PFS1	12.0	5.0	0.13	5000	11.20	3.30	26.0	20.0
YM1205PFB1								
YM1205PFS2								
YM1205PFB2	12.0	5.0	0.10	4500	10.08	2.97	23.4	20.0
YM1205PFS3								
YM1205PFB3								
YM2405PFS1	24.0	10.0	0.06	5000	11.20	3.30	26.0	20.0
YM2405PFB1								
YM2405PFS2								
YM2405PFB2	24.0	10.0	0.05	4500	10.08	2.97	23.4	20.0
YM2405PFS3								
YM2405PFB3								
YM2405PFS3	24.0	10.0	0.04	4000	8.96	2.64	20.8	20.0
YM2405PFB3								