

马达 Motor:Brushless DC,auto restart
Impedance & polarity protected

风叶外壳 Impeller & Frame:Glassfiber reinforced thermoplastic
PBT,UL94V-0

绝缘 Insulation Resistance:Min.10M at DC 500V

耐压 Dielectric Strength:500VAC/1 sec. Max.leakage
500 micro amp.



温度范围 Permissible Temp.Range:Ball bearing -20 °C ~ +75 °C
Sleeve bearing -10 °C ~ +50 °C

安规认证 Safety:UL>CUL>CE

寿命 Life Expectancy at 40 :Ball bearing 50000 hours
Sleeve bearing 30000 hours



BRUSHLESS FAN
80 × 80 × 20mm

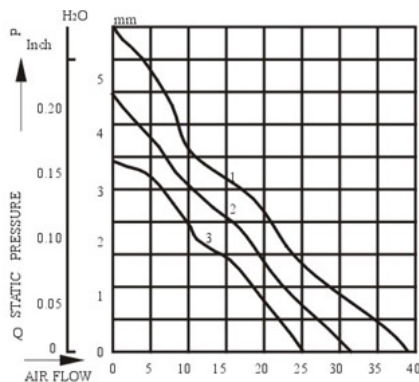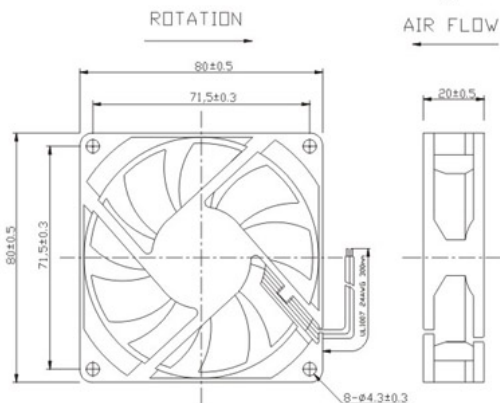

Model (型号)	Rated Voltage (VDC) (额定电压)	Startup Voltage (VDC) (启动电压)	Current Amp (A) (电流)	Speed (rpm) (转速)	Air Flow (CFM) (风量)	Static Pressure (mm-H ₂ O) (风压)	Noise Level (dB-A) (噪音)	Weight (g) (重量)
YM1208PKS1	12.0	5.0	0.17	3000	38.90	5.94	31.0	58.0
YM1208PKB1								
YM1208PKS2	12.0	5.0	0.13	2500	32.42	4.95	25.0	58.0
YM1208PKB2			0.11					
YM1208PKS3	12.0	5.0	0.08	2000	25.93	3.96	20.0	58.0
YM1208PKB3			0.06					
YM2408PKS1	24.0	10.0	0.10	3000	38.90	5.94	31.0	58.0
YM2408PKB1								
YM2408PKS2	24.0	10.0	0.07	2500	32.42	4.95	25.0	58.0
YM2408PKB2			0.06					
YM2408PKS3	24.0	10.0	0.04	2000	25.93	3.96	20.0	58.0
YM2408PKB3								