

马达 Motor: Brushless DC, auto restart  
Impedance & polarity protected

风叶外壳 Impeller & Frame: Glassfiber reinforced thermoplastic  
PBT, UL94V-0

绝缘 Insulation Resistance: Min. 10M at DC 500V

耐压 Dielectric Strength: 500VAC/1 sec. Max. leakage  
500 micro amp.


温度范围 Permissible Temp. Range: Ball bearing -20 °C ~ +75 °C  
Sleeve bearing -10 °C ~ +50 °C

安规认证 Safety: UL > CUL > CE

寿命 Life Expectancy at 40 : Ball bearing 50000 hours  
Sleeve bearing 30000 hours



BRUSHLESS FAN  
80 × 80 × 25mm

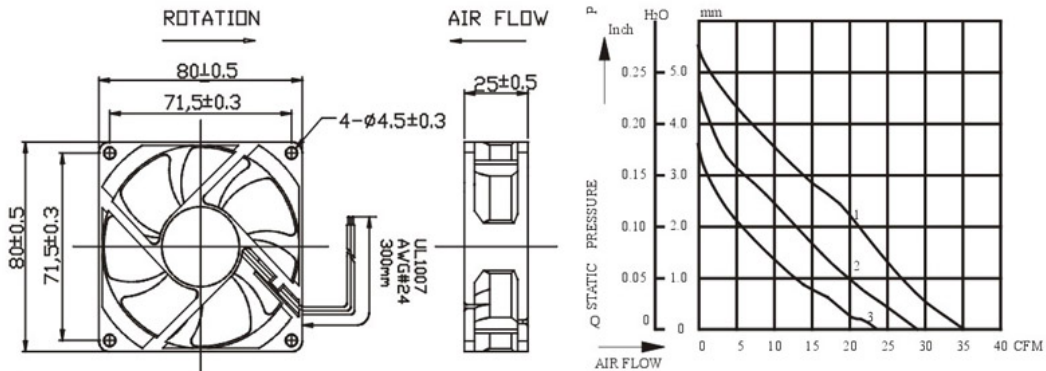

Model (型号)	Rated Voltage (VDC) (额定电压)	Startup Voltage (VDC) (启动电压)	Current Amp (A) (电流)	Speed (rpm) (转速)	Air Flow (CFM) (风量)	Static Pressure (mm-H <sub>2</sub> O) (风压)	Noise Level (dB-A) (噪音)	Weight (g) (重量)
YM1208PTS1	12.0	5.0	0.19	3000	33.59	5.87	33.0	58.0
YM1208PTB1			0.18					
YM1208PTS2	12.0	5.0	0.13	2500	27.99	4.89	27.0	58.0
YM1208PTB2			0.12					
YM1208PTS3	12.0	5.0	0.08	2000	22.39	3.91	22.0	58.0
YM1208PTB3								
YM2408PTS1	24.0	10.0	0.14	3000	33.61	5.87	33.0	58.0
YM2408PTB1			0.13					
YM2408PTS2	24.0	10.0	0.10	2500	28.00	4.89	27.0	58.0
YM2408PTB2			0.09					
YM2408PTS3	24.0	10.0	0.07	2000	22.40	3.91	22.0	58.0
YM2408PTB3			0.06					